



Geometrietabelle

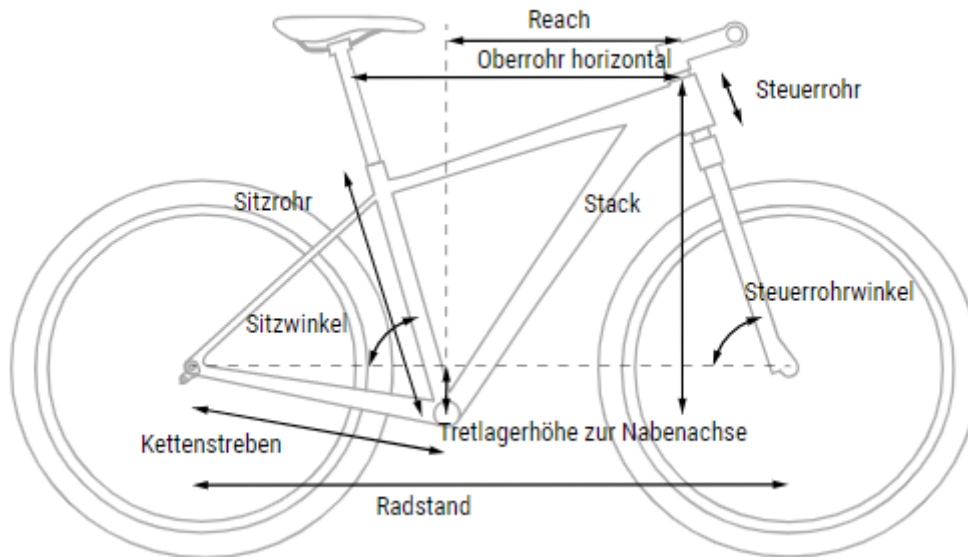

	14" / 27.5 / XS	16" / 27.5 / S	18" / 29 / M	20" / 29 / L	22" / 29 / XL	24" / 29 / XXL
Sitzrohr	340	370	420	470	515	560
Oberrohr horizontal	555	575	595	615	635	655
Sitzwinkel	74	73.5	73.5	73.5	73.5	73.5
Steuerrohrwinkel	68.5	68.5	68.5	68.5	68.5	68.5
Kettenstreben	427	427	450	450	450	450
Steuerrohr	108.2	111	111	121.8	141.8	156.8
Radstand	1067.5	1082.1	1125.4	1146.4	1168.2	1189.6
Tretlagerhöhe zur Nabenachse	51.5	51.5	65	65	65	65
Überstandshöhe - 80mm	707	720	759	792	824	858
Reach	384.4	398	409.2	426.2	440.7	456.6
Stack	595	597.6	627.3	637.4	656	669.9

Geometrietabelle

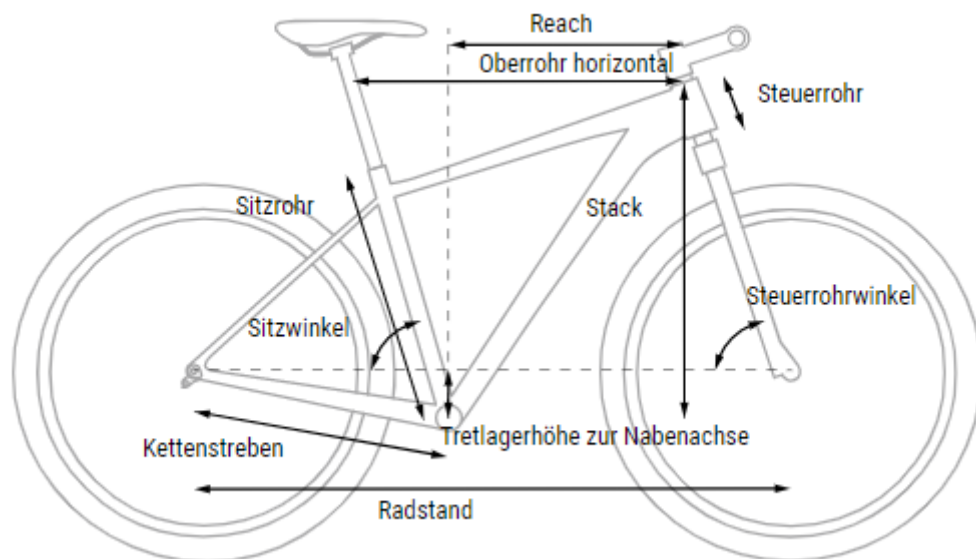

ERGONOMIE

	14" / 27.5 / XS	16" / 27.5 / S	18" / 29 / M	20" / 29 / L	22" / 29 / XL	24" / 29 / XXL
Länge Sattelstütze	350	350	400	400	400	400
Durchmesser Sattelstütze	27.2	27.2	27.2	27.2	27.2	27.2
Winkel Vorbau	6	6	6	6	6	6
Länge Kurbel	170	170	170	170	170	170
Durchmesser Reifen maximal	708	708	747	747	747	747
Länge Vorbau	45	45	60	60	75	75
Breite Lenker	680	680	680	680	680	680