


## Geometrietabelle

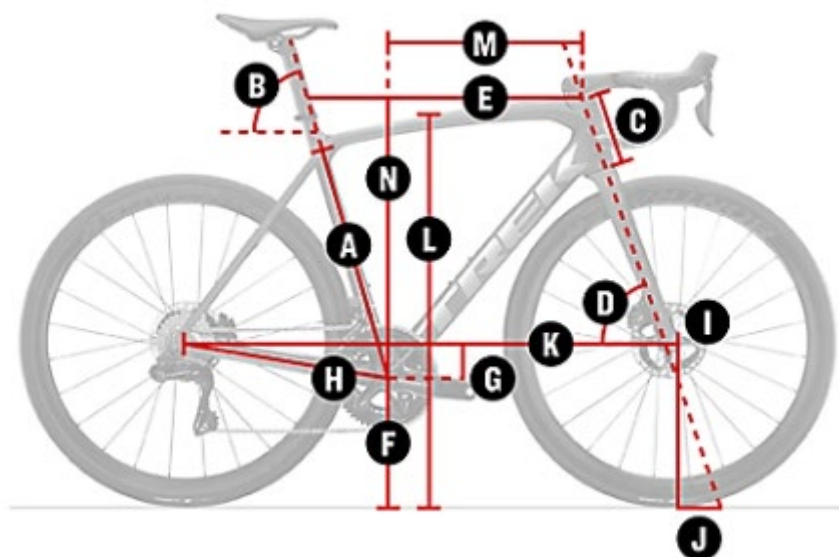

| Größe | Körpergröße des Fahrers      | Innenbeinlänge          |
|-------|------------------------------|-------------------------|
| 47    | 152 - 158 cm<br>5'0" - 5'2"  | 71 - 75 cm<br>28" - 30" |
| 50    | 158 - 163 cm<br>5'2" - 5'4"  | 74 - 77 cm<br>29" - 30" |
| 52    | 163 - 168 cm<br>5'4" - 5'6"  | 76 - 79 cm<br>30" - 31" |
| 54    | 168 - 174 cm<br>5'6" - 5'9"  | 78 - 82 cm<br>31" - 32" |
| 56    | 174 - 180 cm<br>5'9" - 5'11" | 81 - 85 cm<br>32" - 33" |
| 58    | 180 - 185 cm<br>5'11" - 6'1" | 84 - 87 cm<br>33" - 34" |
| 60    | 185 - 190 cm<br>6'1" - 6'3"  | 86 - 90 cm<br>34" - 35" |
| 62    | 190 - 195 cm<br>6'3" - 6'5"  | 89 - 92 cm<br>35" - 36" |

## Sizing table

| Rahmengrößennummer                           | 47 cm | 50 cm | 52 cm | 54 cm | 56 cm | 58 cm | 60 cm | 62 cm |
|--|-------|-------|-------|-------|-------|-------|-------|-------|
| Laufradgröße                                 | 700c  | 700c  | 700c  | 700c  | 700c  | 700c  | 700c  | 700c  |
| A – Sitzrohr                                 | 42.4  | 45.3  | 48.3  | 49.6  | 52.5  | 55.3  | 57.3  | 59.3  |
| B – Sitzwinkel                               | 74.6° | 74.6° | 74.2° | 73.7° | 73.3° | 73.0° | 72.8° | 72.5° |
| C – Steuerrohrlänge                          | 10.0  | 11.1  | 12.1  | 13.1  | 15.1  | 17.1  | 19.1  | 21.1  |
| D – Lenkwinkel                               | 72.1° | 72.1° | 72.8° | 73.0° | 73.5° | 73.8° | 73.9° | 73.9° |
| E – Effektives Oberrohr                      | 51.2  | 52.1  | 53.4  | 54.3  | 55.9  | 57.4  | 58.6  | 59.8  |
| G – Tretlagerabsenkung                       | 7.2   | 7.2   | 7.2   | 7.0   | 7.0   | 6.8   | 6.8   | 6.8   |
| H – Kettenstrebenlänge                       | 41.0  | 41.0  | 41.0  | 41.0  | 41.0  | 41.1  | 41.1  | 41.2  |
| I – Offset                                   | 4.5   | 4.5   | 4.5   | 4.5   | 4.0   | 4.0   | 4.0   | 4.0   |
| J – Trail                                    | 6.8   | 6.2   | 5.8   | 5.6   | 5.8   | 5.7   | 5.6   | 5.6   |
| K – Radstand                                 | 97.2  | 97.4  | 97.7  | 98.1  | 98.3  | 99.2  | 100.1 | 101.0 |
| L – Überstandshöhe                           | 69.2  | 71.1  | 73.2  | 74.4  | 76.8  | 79.3  | 81.1  | 82.9  |
| M – Rahmen-Reach                             | 37.3  | 37.8  | 38.3  | 38.6  | 39.1  | 39.6  | 39.9  | 40.3  |
| N – Rahmen-Stack                             | 50.7  | 52.1  | 53.3  | 54.1  | 56.3  | 58.1  | 60.1  | 62.0  |
| Vorbaulänge                                  | 70.0  | 80.0  | 90.0  | 90.0  | 100.0 | 110.0 | 110.0 | 110.0 |
| Min. Sattelstrebenhöhe (mit kurzem Sitzturm) | 55.5  | 58.5  | 61.5  | 64.0  | 67.0  | 69.0  | 71.0  | 73.0  |
| Max. Sattelstrebenhöhe (mit kurzem Sitzturm) | 61.5  | 64.5  | 67.5  | 70.0  | 73.0  | 75.0  | 77.0  | 79.0  |
| Min. Sattelstrebenhöhe (mit langem Sitzturm) | 59.0  | 62.0  | 65.0  | 67.5  | 70.5  | 72.5  | 74.5  | 76.5  |
| Max. Sattelstrebenhöhe (mit langem Sitzturm) | 65.0  | 68.0  | 71.0  | 73.5  | 76.5  | 78.5  | 80.5  | 82.5  |