


Geometrietabelle

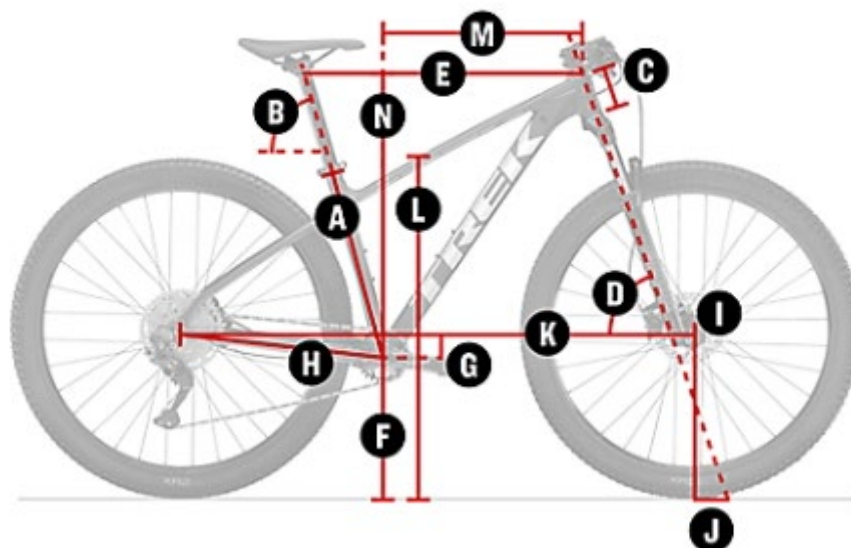

Größe	Körpergröße des Fahrers	Innenbeinlänge
XS	145 - 155 cm 4'9" - 5'1"	69 - 73 cm 27" - 29"
S	155 - 165 cm 5'1" - 5'5"	74 - 78 cm 29" - 31"
M	165 - 173 cm 5'5" - 5'8"	79 - 81 cm 31" - 32"
M/L	173 - 180 cm 5'8" - 5'11"	81 - 86 cm 32" - 34"
L	180 - 188 cm 5'11" - 6'2"	86 - 89 cm 34" - 35"
XL	188 - 195 cm 6'2" - 6'5"	89 - 91 cm 35" - 36"
XXL	195 - 203 cm 6'5" - 6'8"	91 - 97 cm 36" - 38"

Sizing table

Rahmengrößennummer	13.5	15.5	17.5	18.5	19.5	21.5	23.0
Rahmengrößenbuchstabe	XS	S	M	ML	L	XL	XXL
Laufgradgröße	27.5"	27.5"	29"	29"	29"	29"	29"
A – Sitzrohr	34.3	36.8	41.9	44.4	47.0	52.1	55.9
B – Sitzwinkel	73.5°	73.5°	71.9°	71.9°	71.9°	71.9°	71.9°
Effektiver Sitzwinkel	73.5°	73.5°	73.0°	73.0°	73.0°	73.0°	73.0°
C – Steuerrohrlänge	9.0	9.0	9.0	9.0	10.0	12.0	12.0
D – Lenkwinkel	69.3°	69.3°	69.5°	69.5°	69.5°	69.5°	69.5°
E – Effektives Oberrohr	54.4	55.5	60.2	61.8	63.8	65.9	67.3
F – Tretlagerhöhe	29.2	30.2	31	31	31	31	31.1
G – Tretlagerabsenkung	5.8	4.8	5.8	5.8	5.8	5.8	5.8
H – Kettenstrebenlänge	43.8	43.8	43.8	43.8	43.8	43.8	43.8
I – Offset	4.2	4.2	4.2	4.2	4.2	4.2	4.2
J – Trail	8.8	8.8	9.3	9.3	9.3	9.3	9.3
K – Radstand	104.9	106.6	110.0	111.6	113.7	115.9	117.3
L – Überstandshöhe	65.8	68.6	74.8	75.8	75.7	76.9	80.4
M – Rahmen-Reach	37.6	38.5	41.8	43.4	45.1	46.6	48.0
N – Rahmen-Stack	56.5	57.4	60.2	60.2	61.1	63.0	63.0